




## SquareBolt®

2150(F)

Just as easy to open as traditional latchbolts, the SquareBolt® exit device's unique construction offers innovative protection. Its patented *SquareBolt* (Pat. no. 5,605,362) design presents an improved physical barrier over standard rim latchbolts. The *SquareBolt* exit device locks into place and stays there. Credit cards, crowbars, door rattling and shaking are resisted, significantly reducing the threat of unauthorized entry.

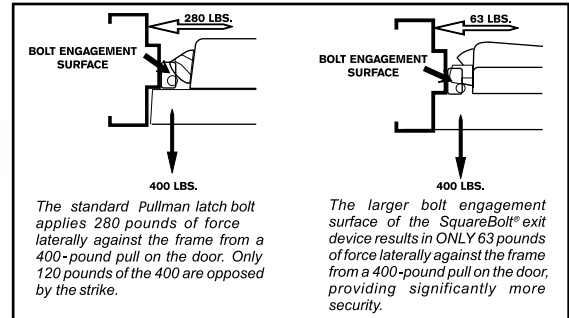


### certification/compliance

UL/cUL Listed: FVSR/FVSR7 - Panic hardware  
GXHX/GXHX7 - Fire exit hardware (F)  
(4' x 8' single, 8' x 8' pairs, 3 hr.)

ANSI/BHMA Certified: A156.3 Type 1 or 28, Grade 1  
U.S. Patent #: 5,605,362



### features

- Patented *SquareBolt* security deadbolt (Pat. no. 5,605,362) designed for maximum holding power
- Designed for wide stile doors
- Non-handed for easy installation
- Steel interlock "E" bracket maintains door-to-mullion relationship in fire-labeled devices
- Available certified as part of a hurricane resistant assembly (refer to local codes). Specify 2150(F)WS.  Hurricane

### applications

- Single swing doors
- Pairs of doors (mullion required)
- Metal, wood or composite door materials

### specifications

Door Opening Width:	-36 for 30" - 36" (76cm - 91cm) doors -42 for 36" - 42" (91cm - 107cm) doors -48 for 42" - 48" (107cm - 122cm) doors
Door Thickness:	1-3/4" (44mm) standard. Optional door thicknesses available to 4-1/2"; specify door thickness when ordering.
Minimum Stile Width:	4-1/2" (114mm)
Projection:	2-1/2" (64mm) active, 1-3/4" (44mm) depressed
Deadbolt:	Patented 1" (25mm) slide projection bolt with full 3/4" (19mm) projection
Strike:	757F, 793 optional (double door application, panic only)
Fasteners:	Machine screws and wood door fasteners standard for panic hardware. Sex nuts and bolts supplied standard for fire exit hardware.
Trims:	121NL cylinder only, 210F series utility trim, 440F series rose trim, 580F series rose trim with escutcheon plate, 620F series escutcheon trim, 630F series pull/thumbpiece trim. See pages 13-15.
Dogging:	Hex key dogging supplied standard on panic devices
Finishes:	605, 606, 612, 613E, 630, 689, 691, 693, 695
Options:	Shim kit #223, sex nuts and bolts, MicroShield®
Warranty:	3-year limited